(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 27 January 2005 (27.01.2005)

PCT

(10) International Publication Number WO 2005/008843 A2

(51) International Patent Classification?: H01R 13/00

110114 154

(21) International Application Number:

PCT/JP2004/010370

(22) International Filing Date: 14 July 2004 (14.07.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2003-198220

17 July 2003 (17.07.2003) JP


- (71) Applicant (for all designated States except US): YAZAKI CORPORATION [JP/JP]; 4-28, Mita 1-chome, Minato-ku, Tokyo 108-8333 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CHIBA, Shingo [JP/JP]; c/o Yazaki Parts Co., Ltd., 206-1, Nunobikibara, Haibaracho,, Haibara-gun, Shizuoka 421-0407 (JP). MAT-SUSHITA, Haruyuki [JP/JP]; c/o Yazaki Syscomplus

Co., Ltd., 206-1, Nunobikibara, Haibaracho,, Haibara-gun, Shizuoka 421-0407 (JP).

- (74) Agents: TAKINO, Hideo et al.; 4th Floor, Hiroo SK bldg., 36-13, Ebisu 2-chome, Shibuya-ku, Tokyo 150-0013 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRIC EQUIPMENT MODULE STRUCTURE

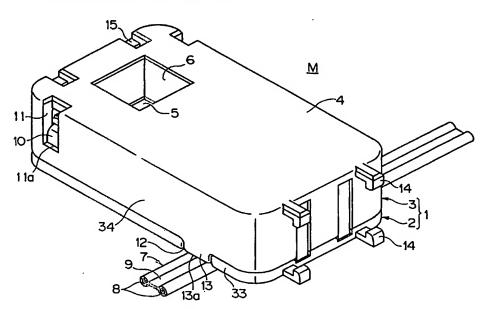

(57) Abstract: A case 1 comprises a base 2 and a cover 3, a terminal is disposed in the case, an electric wire 8 connected to the terminal is arranged in the base, a cutout portion 12 to bend and guide out the electric wire is penetrated and formed in the base 2, and an electric equipment module structure in which the outside opening of the cutout portion is closed by the cover is adopted. A projection 13 pressing the electric wire 8 in the cutout portion 12 is formed in the cover 3, and the electric wire is bent along with the projection 13. The base 2 and cover 3 have a connection portion 14 at the end, and have a connected portion 15 at the other end, respectively, and a plurality of cases 1 can be connected mutually. The connection portion 14 biases the base 2 and cover 3 in the closing direction.



WO 2005/008843 A2



Published:

 without international search report and to be republished upon receipt of that report For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.